


| |
|---|
| APPROVED AS NOTED FOR PRODUCTION |
| APPROVED FOR PRODUCTION |
| REVISE AND RESUBMIT |
| AUTHORIZED SIGNATURE _____ DATE / /07 |
| ADVISE JOBSITE STATUS IMMEDIATELY FOR EFFICIENT PRODUCTION SCHEDULING |

NOTE:
 PROVIDE WALL CONSTRUCTION SUITABLE FOR ATTACHMENT OF RAIL BRACKETS AT SHOWN ELEVATIONS. MUST BE CAPABLE OF 300# PULLOUT LOADING WITH MAX DEFLECTION OF 1/8"

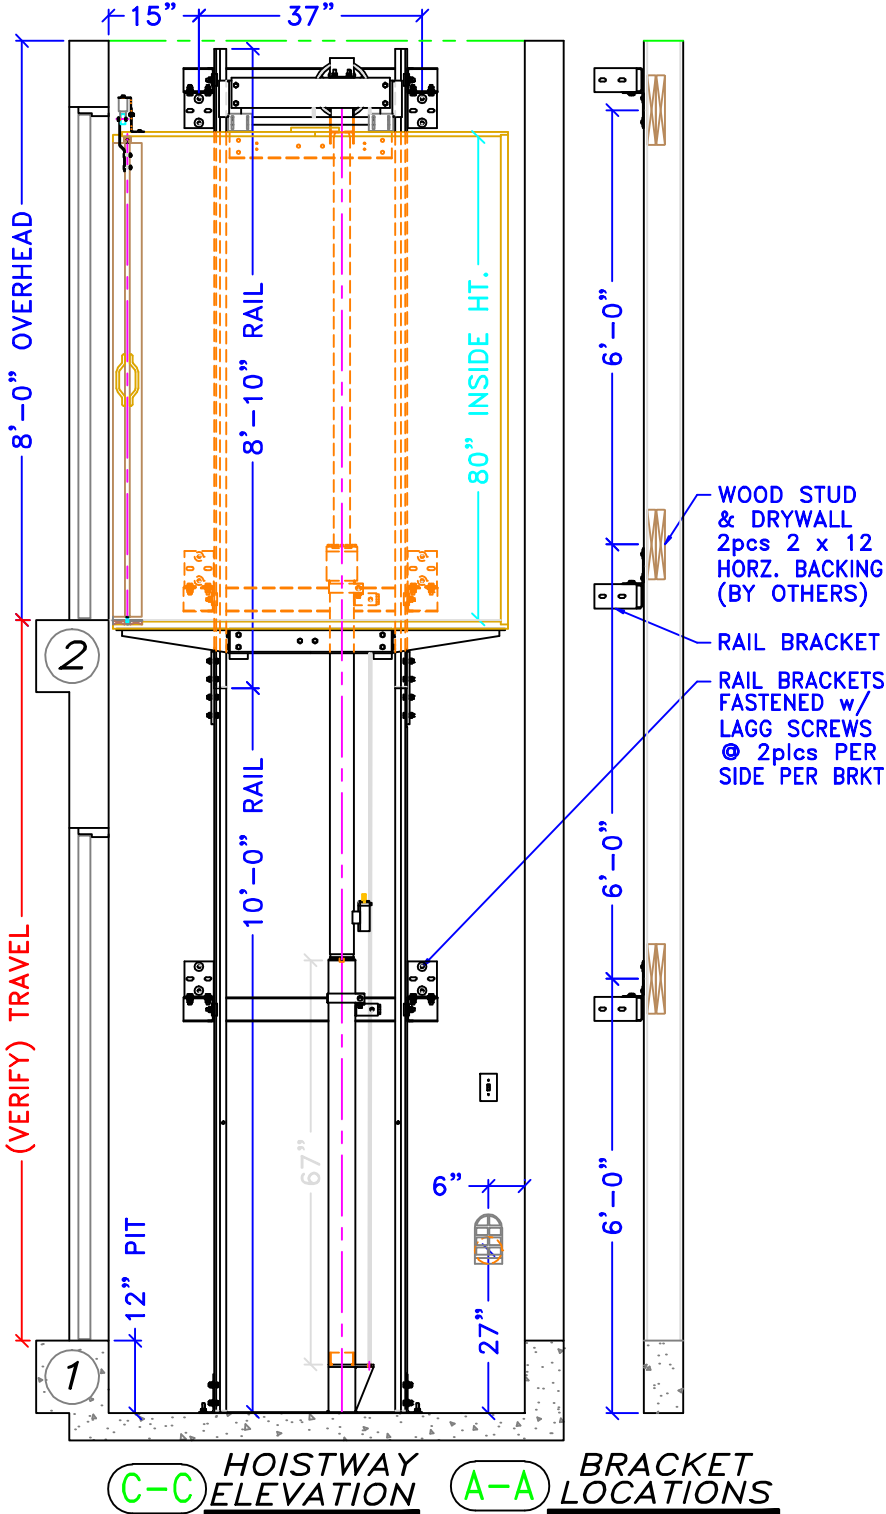

SALES-10f2-10/01/07

WORK BY OTHERS

TO BE PROVIDED BY OWNER AND/OR GENERAL CONTRACTOR:

- Legal hoistway of proper size, plumb within 1" per 100', and pit of proper depth.
- Suitable machine room with legal access & clearances, properly heated & ventilated. Temperature not to exceed 35°C(95°F).
- Hoistway guard & barricades during installation.
- Supports for rail fastenings where specified.
- Venting of hoistways as required by code.
- All cutting of walls, floors, of partitions together with all repairs, grouting, patching, and painting made necessary by such cutting or changes.
- Heavy duty fused main line switch in machine room for each elevator with feeders connected to each controller.
- Lights, light switch, and convenience outlets in elevator machine room.
- 120V/1Ø/20amp service & telephone outlet for each elevator connected to controller(s) in elevator machine room for car lights & accessories.
- Light, light switch, and convenience outlet in elevator pit where required.
- Finished cab floor coverings.
- All other equipment necessary & not otherwise called for in elevator contract.

TIGER LIFT

| | | | |
|-------------------|----------------|------------------|----------|
| MODEL | X528 | SERVICE | LULA |
| SPEED | 28 FPM | CAPACITY | - |
| TRAVEL | VERIFY | OPERATION | SPBA |
| NO. LANDINGS | 2 | # CAR GATES | 1 |
| CAB TYPE | - | SPECIES | VERIFY |
| HANDRAIL TYPE | ALUMINUM | CEILING COLOR | WHITE |
| GATE TYPE | WOODFOLD | GATE FINISH | VERIFY |
| GATE OPERATION | MANUAL | GATE SIZE | 42 x 80" |
| FLOOR DESIGNATION | 1,2 | FIXTURE FINISH | POL.BR. |
| ILLUMINATE | X EMERG. LIGHT | X MICROPRO. | |
| CAR TOP STATION | RET. CAM | FIRE SERVICE | |
| RUPTURE VALVE | X AUTO LIGHT | X IN USE LT | |
| KEY SW/MOMENT | AUTO LOWER | TANK HT. | |
| KEY SW/MAINT | AUTO DOOR | ROLLERS | X |
| ARRIVAL LIGHT | AUTO GATE | PHONE BOX | |
| ARRIVAL GONG | POSITION IND. | SLIM PHONE | |
| DOOR MONITOR | | ADA PHONE | |
| CAR WEIGHT# | - | GROSS WEIGHT# | - |
| RAIL SIZE | 8# | PLUNGER DIAMETER | - |
| MOTOR HP | - | PLUNGER WALL | - |
| MOTOR RPM | - | MIN. PSI | - |
| VALVE MODEL | - | MAX. PSI | - |
| PUMP MODEL | - | SAFETY MODEL | - |
| PUMP GPM | - | HOIST CABLE | 3/8 7x19 |
| INLET SIZE | SEE INLET | LINE VOLTAGE | - |
| BUFFER CAPACITY | 1Ø1400# | CONTROL VOLTAGE | - |
| BUFFER STROKE | 1 1/8" | MOTOR STARTING | - |
| PLATEN EXT.(X3) | - | MOTOR RUNNING | - |
| INTERLOCK TYPE | G.A.L. SM | CABLE LENGTH | - |



ELEVATOR CONCEPTS LTD

18720 Krause Riverview, MI 48193
 Phone (734) 248-4700 Fax (734) 248-2547
 www.elevatorconcepts.com

| | |
|--------------|-----------|
| JOB NAME: | - |
| ADDRESS: | - |
| CITY: | - |
| ARCHITECT: | - |
| CONTRACTOR: | - |
| CUSTOMER: | - |
| REVISIONS: | UPDATED - |
| DRN. BY: TJM | DATE: - |
| JOB# | SALES |