



-SAMPLE DRAWING-  
DO NOT USE  
FOR CONSTRUCTION

-SAMPLE DRAWING-  
DO NOT USE  
FOR CONSTRUCTION

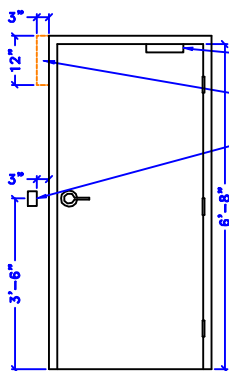


DOOR CLOSER (BY OTHERS)  
DOOR ROLLER POCKET (BY OTHERS)  
2 1/4" x 3 1/2" x 3"D CUTOUT ON ALL FLOORS FOR CALL BUTTON BOX (BY OTHERS)  
B LABEL DOOR WITH CLOSER PASSAGE SET & 4 3/4" FRAME (BY OTHERS)

NOTE:  
DOOR FRAME MUST HAVE 4 3/4" JAMB DEPTH & OFFSET AS SHOWN FOR DOOR INTERLOCKS, DO NOT SUBSTITUTE w/o CONSULTING ELEVATOR CONTRACTOR.  
2 x 3" DOOR ROLLER POCKET STARTING AT TOP OF DOOR FRAME EXTENDING DOWN 12" (BY OTHERS)



DOOR ROLLER POCKET  
ISOMETRIC VIEW




**DOOR ELEVATION**

**DOOR FRAME DETAIL**

LEVEL 2 ENTRANCE AS SHOWN - LEVEL 1 OPPOSITE

**NOTE:**  
PROVIDE WALL CONSTRUCTION SUITABLE FOR ATTACHMENT OF RAIL BRACKETS MIN. DOUBLE 2 x 12 THE FULL WIDTH OF HOISTWAY AT ELEVATIONS SHOWN. MUST BE CAPABLE OF 300# PULLOUT LOADING WITH MAX DEFLECTION OF 1/8"

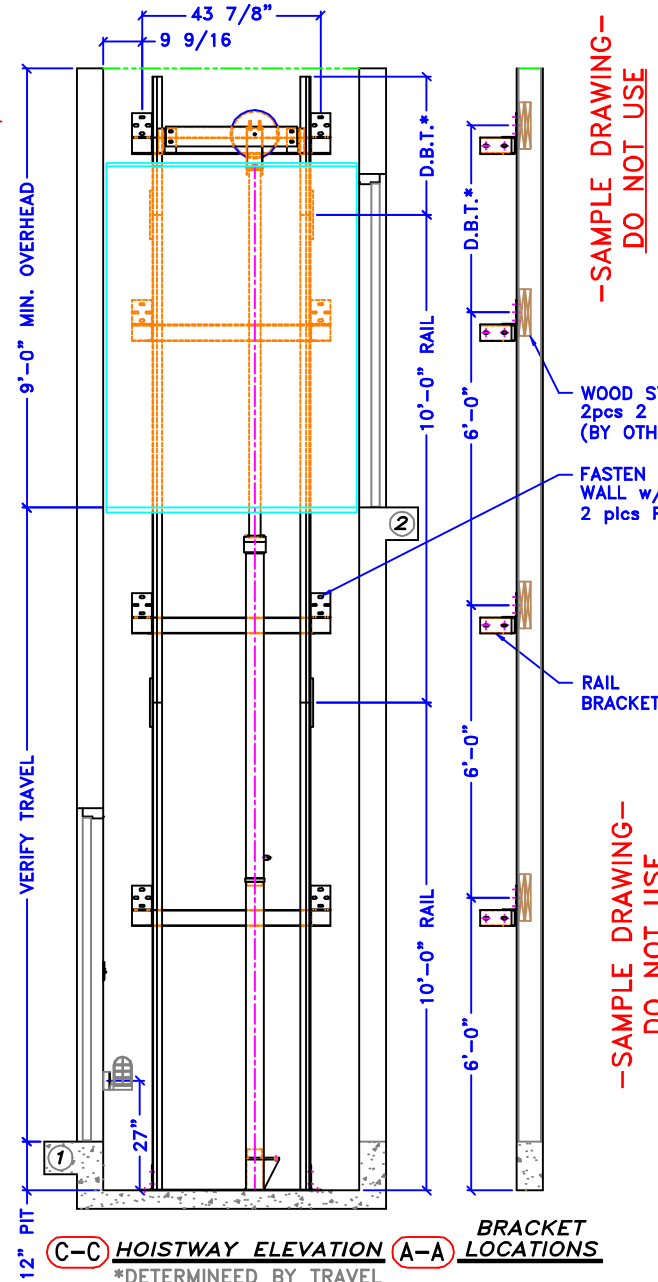

-SAMPLE DRAWING-  
DO NOT USE  
FOR CONSTRUCTION

-SAMPLE DRAWING-  
DO NOT USE  
FOR CONSTRUCTION

**WORK BY OTHERS**

- TO BE PROVIDED BY OWNER AND/OR GENERAL CONTRACTOR:**
- Legal hoistway of proper size, plumb within 1" per 100', and pit of proper depth.
  - A 12" square blackout in elevator pit floor, to be filled when plunger assembly has been installed.(X3)
  - 10" PVC cylinder casing per drawings.(X3)
  - Suitable machine room with legal access & clearances, properly heated & ventilated. Temperature not to exceed 35°C(95°F).
  - Hoistway guard & barricades during installation.
  - Supports for rail fastenings where specified.
  - Venting of hoistways as required by code.
  - All cutting of walls, floors, of partitions together with all repairs, grouting, patching, and painting made necessary by such cutting or changes.
  - Heavy duty fused main line switch in machine room for each elevator with feeders connected to each controller.
  - Lights, light switch, and convenience outlets in elevator machine room.
  - 120V/1Ø/20amp service & telephone outlet for each elevator connected to controller(s) in elevator machine room for car lights & accessories.
  - Light, light switch, and convenience outlet in elevator pit where required.
  - Finished cab floor coverings.
  - All other equipment necessary & not otherwise called for in elevator contract.

**TIGER LIFT**

MODEL	X5	SERVICE	BLD
SPEED	28 RPM	CAPACITY	700
TRAVEL	VERIFY	OPERATION	SPR
NO. LANDINGS	2	NO. CAR GATES	2
CAB TYPE	STD	CAB COLOR	?
HANDRAIL TYPE	ALUMINUM	CEILING COLOR	WHITE
GATE TYPE	WOODFOLD	GATE FINISH	OK WVL
GATE OPERATION	MANUAL	GATE SIZE	36"(L/R)
FLOOR DESIGNATION	1, 2	FIXTURE FINISH	SS#4
ILLUMINATE	X	EMERG. LIGHT	MICROPRO.
SCREW PUMP		AUTO LIGHT	RET. CAM
FIRE SERVICE		RUPTURE VALVE	IN USE LT
KEY SW/MOMENT		AUTO LOWER	TANK HT.
ARRIVAL LIGHT		KEY SW/MAINT	AUTO DOOR
ARRIVAL GONG		CAR TOP STATION	AUTO GATE
DOOR MONITOR		POSITION IND.	SOFTWARE
PHONE		PHONE BOX	HARDWARE
CAR WEIGHT	-	GROSS WEIGHT	-
RAIL SIZE	Ø	PLUNGER DIAMETER	2.75
MOTOR HP	3.5	PLUNGER WALL	250
MOTOR RPM	1750	MIN. PSI	-
VALVE MODEL	KVIP	MAX. PSI	-
PUMP MODEL	20-38	SAFETY MODEL	ED1-A
PUMP GPM	4.33	HOIST CABLE	3/8 Bx19
FEED PIPE	1/2	LINE VOLTAGE	208 1Ø
BUFFER CAPACITY	750	CONTROL VOLTAGE	24
BUFFER STROKE	2.25	MOTOR STARTING	55
PLATEN EXT.(X3)	-	MOTOR RUNNING	17
INTERLOCK Ø1	SM RH 90°	INTERLOCK Ø2	SM LH 90°

**ELEVATOR CONCEPTS LTD**  
18720 KRAUSE RIVERVIEW, MI. 48192

JOB NAME: WOODFOLD Ø 1 & 2 - 36 x 54  
ADDRESS: -  
CITY: -  
ARCHITECT: -  
CONTRACTOR: -  
CUSTOMER: -  
REVISIONS: -  
DRAWN: DJB DATE: 04/24/01 DWG# 34\_3654WF12